


## EDL-65TW - PA Loudspeaker

100V

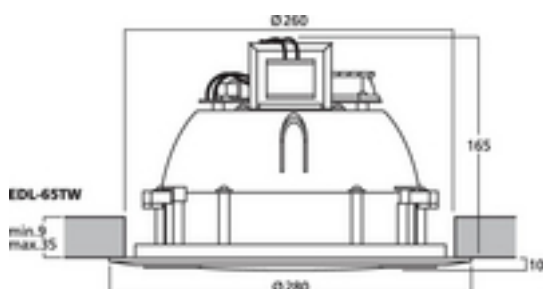

### Drejelig PA loftshøjtaler

- 100 V line-teknologi
- Høj effekt med et max. på 30 W
- 2-vejs coaxialt højtalersystem i høj kvalitet med 2-vejs delefilter
- Selve højtaleren kan drejes for optimering af den indendørs lydspredning
- Plastikkabinet i høj kvalitet med metalgitter
- Plastikmateriale i ABS, som er selvslukkende i overensstemmelse med UL 94V-0
- Til lofter med en tykkelse fra 9 til 35 mm

## Technical data:

Impedance (Z)	: -
Transmission technology	: 100 V
Frequency range	: 50-20,000 Hz
Resonant frequency (fs)	: -
Rec. crossov. frequ. (fmax.) (12 dB/oct.)	: -
Power rating (RMS)	: 30/15/7.5 W
Peak music power output (MAX)	: -
SPL	: 91 dB/W/m
Max. rated SPL	: -
Max. voltage	: -
Radiation angle	: -
Radiation angle, horizontal	: -
Radiation angle, vertical	: -
Suspension compl. (Cms)	: -
Moving mass (Mms)	: -
Mech. Q factor (Qms)	: -
Electr. Q factor (Qes)	: -
Total Q factor (Qts)	: -
Equivalent volume (Vas)	: -
DC resistance (Re)	: -
Force factor (BxL)	: -
Voice coil induct. (Le)	: -
Voice coil diameter	: -
Voice coil former	: -
Linear excursion (X <sub>MAX</sub> )	: -
Eff. cone area (Sd)	: -
Magnet weight	: -
Magnet diameter	: -
Mounting cutout	: $\varnothing$ 260 mm
Mounting depth	: 165 mm
Mounting hole diameter	: -
Hole spacing X-axis	: -
Hole spacing Y-axis	: -
Dimensions	: $\varnothing$ 280 mm x 175 mm
Outside diameter	: -

Width	: ~ 280 mm
Height	: -
Depth	: 175 mm
Colour	: white
Protective class	: -
Admiss. ambient temp.	: 0-40 °C
Weight	: 2.38 kg
Packing unit	: -
Type of speaker	: 180
Packing dimensions (W x H x L)	: 0.33 x 0.22 x 0.33 m
Gross weight	: 3.12 kg
Net weight	: 2.38 kg
100 V	: 1