
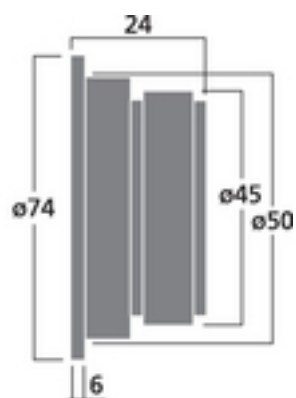


DT-74/8 - HiFi Dome Tweeter

FERRO
FLUID

30
W_{RMS}

11
mm

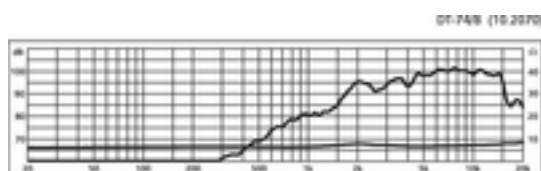

Miniature hi-fi tweeter, 15 W, 8 Ohm

- 11 mm dome with diffuser
- Extra high efficiency
- Brilliant sound, similar to some ribbon tweeters
- For hi-fi and Public Address

Technical data:

Impedance (Z)	: 8 Ohm
Transmission technology	: -
Frequency range	: fx-18,000 Hz
Resonant frequency (fs)	: 2,000 Hz
Rec. crossov. frequ. (fmax.) (12 dB/oct.)	: 5,000 Hz
Power rating (RMS)	: 15 W
Peak music power output (MAX)	: 30 W
SPL	: 98 dB/W/m
Max. rated SPL	: -
Max. voltage	: -
Radiation angle	: -
Radiation angle, horizontal	: -
Radiation angle, vertical	: -
Suspension compl. (Cms)	: -
Moving mass (Mms)	: -
Mech. Q factor (Qms)	: -
Electr. Q factor (Qes)	: -
Total Q factor (Qts)	: -
Equivalent volume (Vas)	: -
DC resistance (Re)	: -
Force factor (BxL)	: -
Voice coil induct. (Le)	: -
Voice coil diameter	: $\tilde{\text{A}} \sim 11 \text{ mm}$
Voice coil former	: -
Linear excursion (X_{MAX})	: -
Eff. cone area (Sd)	: -
Magnet weight	: -
Magnet diameter	: $\tilde{\text{A}} \sim 45 \text{ mm}$
Mounting cutout	: $\tilde{\text{A}} \sim 50 \text{ mm}$
Mounting depth	: 24 mm
Mounting hole diameter	: -
Hole spacing X-axis	: -
Hole spacing Y-axis	: -
Dimensions	: $\tilde{\text{A}} \sim 74 \times 24 \text{ mm}$
Outside diameter	: $\tilde{\text{A}} \sim 74 \text{ mm}$

Width	: Å~ 74 mm
Height	: -
Depth	: 24 mm
Colour	: black
Protective class	: -
Admiss. ambient temp.	: 0-40 °C
Weight	: 0.12 kg
Packing unit	: 1
Type of speaker	: -
Packing dimensions (W x H x L)	: 0.075 x 0.03 x 0.075 m
Gross weight	: 0.135 kg
Net weight	: 0.12 kg
Low-impedance	: 1