


## PA-4040 - PA Amplifier

482 mm  
19"

100V

4Ω

8Ω

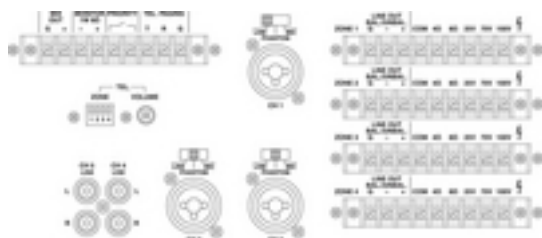

**4-zoner matrix mixerforstærker**, med professionelle funktioner til generel "multi-room" anvendelse.

- 40 W pr zone
- 100 V og 4 Ohm/8 Ohm
- Perfekt udnyttelse af kapaciteten og god beskyttelse af de tilsluttede højttaler via integreret limiter
- 3 kombinerede mikrofon-/line-indgange
- 2 stereo line-indgange; phono
- Alle indgange har gain, 2-vejs tonekontrol, mute-tast og zonevælger
- Mikrofonindgange med +15 V phantom strømforsyning
- Prioritet for kanal 1
- Separat paging indgang, som kan routes til alle zoner
- 4 zoneudgange, som kan justeres individuelt
- Zone og monitor line-udgange til ekstra forstærkere eller optagere
- Tilslutning for monitorhøjttalere
- VU-meter for zone og monitor

- Justerbar hovedtelefonudgang
- Trinløs justerbar temperaturstyret blæser
- 230 V

**PROSOUND 02/2008**

"You have to practice a very long time in order to cause an operating error. An absolutely useful unit available at a favourable price."

## Technical data:

100 V	: 1
Low-impedance	: 1
Peak output power	: 4 x 65 W
Power rating	: 4 x 40 W
Power rating at 2 Ohm	: -
Power rating at 4 Ohm	: -
Power rating at 8 Ohm	: -
Power rating at 16 Ohm	: -
Power rating at 100 V	: -
Power rating with 4 Ohm bridged operation	: -
Power rating with 8 Ohm bridged operation	: -
Output impedance	: -
Channels	: 5
Zones	: 4
Inputs	: 5Â mV/4Â kOhm, 100Â mV/10Â kOhm (mic/line), 100 mV/30 kOhm (line)
Attenuation factor	: -
Frequency range	: 50-17,000 Hz
Crossover network	: -
Crossover frequency	: -
Integrated limiter	: yes
Equalizer bass	: $\pm 10\hat{\text{A}}$ dB/100Â Hz
Equalizer midrange	: -
Equalizer treble	: $\pm 10\hat{\text{A}}$ dB/10Â kHz
S/N ratio	: ? 65 dB (mic), ? 75 dB (line)
Crosstalk attenuation	: -
THD	: < 1%
Phantom power	: 15 V
Mains voltage	: $\sim$ 230 V
Mains frequency	: 50 Hz
Power consumption, operation	: 450 VA
Power consumption, standby	: -
Standby current	: -
Operating voltage (possible alternative)	: -

Power supply (possible  
alternative)  
Admiss. ambient temp.

: -

: 0-40 °C

**MONACOR**



Width	: 482 mm
Height	: 133 mm
Depth	: 310 mm
Rack units, RU	: 3
Weight	: 15 kg
Connections	: 3 x combo 6.3 mm/XLR (mic/line), 2 x RCA L/R (line), screw terminal (mix out), screw contacts (paging), screw contacts (priority), 3.5 mm stereo jack (headphones), screw contacts (speaker zone), screw contacts (monitor speak
Packing dimensions (W x H x L)	: 0.43 x 0.23 x 0.56 m
Gross weight	: 18.46 kg
Net weight	: 15.92 kg