


EDL-706/12 - PA Loudspeaker

100V

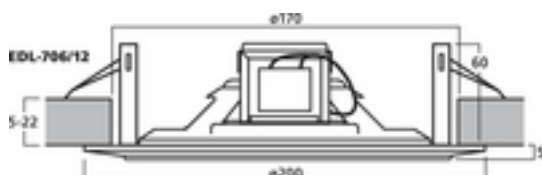

PA ceiling speaker

- 100 V transmission technology via audio transformer with power taps
- For a ceiling thickness from 5 to 22 mm
- Full range speaker, type 165
- Good speech intelligibility
- Robust metal version (basket and protective grille)

Supplied in packing units (PU) of 12 pcs. only

Technical data:

| | |
|---|---------------------|
| Impedance (Z) | : - |
| Transmission technology | : 100 V |
| Frequency range | : 120-17,000 Hz |
| Resonant frequency (fs) | : - |
| Rec. crossov. frequ. (fmax.) (12 dB/oct.) | : - |
| Power rating (RMS) | : 6/3/1.5 W |
| Peak music power output (MAX) | : - |
| SPL | : 93 dB/W/m |
| Max. rated SPL | : - |
| Max. voltage | : - |
| Radiation angle | : - |
| Radiation angle, horizontal | : - |
| Radiation angle, vertical | : - |
| Suspension compl. (Cms) | : - |
| Moving mass (Mms) | : - |
| Mech. Q factor (Qms) | : - |
| Electr. Q factor (Qes) | : - |
| Total Q factor (Qts) | : - |
| Equivalent volume (Vas) | : - |
| DC resistance (Re) | : - |
| Force factor (BxL) | : - |
| Voice coil induct. (Le) | : - |
| Voice coil diameter | : - |
| Voice coil former | : - |
| Linear excursion (X _{MAX}) | : - |
| Eff. cone area (Sd) | : - |
| Magnet weight | : - |
| Magnet diameter | : - |
| Mounting cutout | : Å~ 170 mm |
| Mounting depth | : 60 mm |
| Mounting hole diameter | : - |
| Hole spacing X-axis | : - |
| Hole spacing Y-axis | : - |
| Dimensions | : Å~ 200 mm x 65 mm |
| Outside diameter | : Å~ 200 mm |

| | |
|--------------------------------|------------------------|
| Width | : Å~ 200 mm |
| Height | : - |
| Depth | : 65 mm |
| Colour | : white |
| Protective class | : - |
| Admiss. ambient temp. | : 0-40 °C |
| Weight | : 0.6 kg |
| Packing unit | : 12 |
| Type of speaker | : 165 |
| Packing dimensions (W x H x L) | : 0.23 x 0.48 x 0.43 m |
| Gross weight | : 9.25 kg |
| Net weight | : 7.2 kg |
| 100 V | : 1 |